




## Delayed PZE X4V



Contact expander module for increasing the number of available contacts

### Approvals

	PZE X4V
	◆
	◆
	◆

### Unit features

- ▶ Positive-guided relay outputs:
  - 4 safety contacts (N/O), delay-on de-energisation
- ▶ Connection for feedback loop
- ▶ LED indicator for:
  - Switch status channel 1/2
- ▶ See order reference for unit types

### Unit description

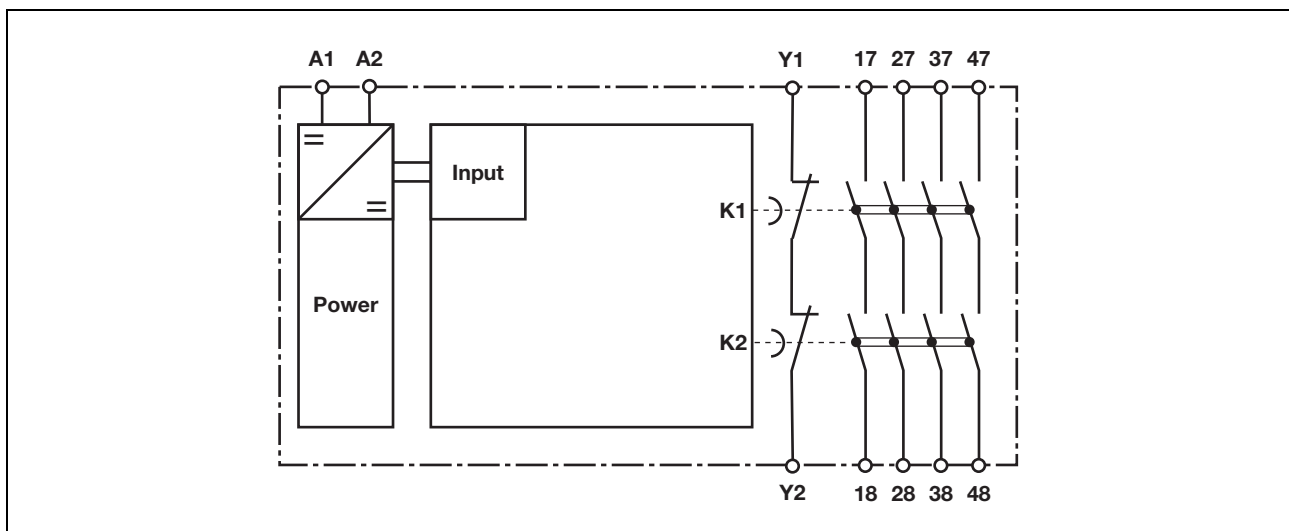
The unit meets the requirements of EN 60204-1 and IEC 60204-1. The contact expander module is used to increase the number of contacts available on a base unit. Base units are all safety relays with feedback loop. The category that can be achieved in accordance with EN 954-1 depends on the category of the base unit. The contact expander module may not exceed this. The delay-on de-energisation safety contacts may only be used up to category 3.

### Safety features

The unit meets the following safety requirements:

- ▶ The contact expander module expands an existing circuit. As the output relays are monitored via the base unit's feedback loop, the safety functions on the existing circuit are transferred to the contact expander module.
- ▶ The safety function remains effective in the case of a component failure.
- ▶ Earth fault in the feedback loop: Detected, depending on the base unit that is used.
- ▶ Earth fault in the input circuit: The output relays de-energise and the safety contacts open.

### Block diagram

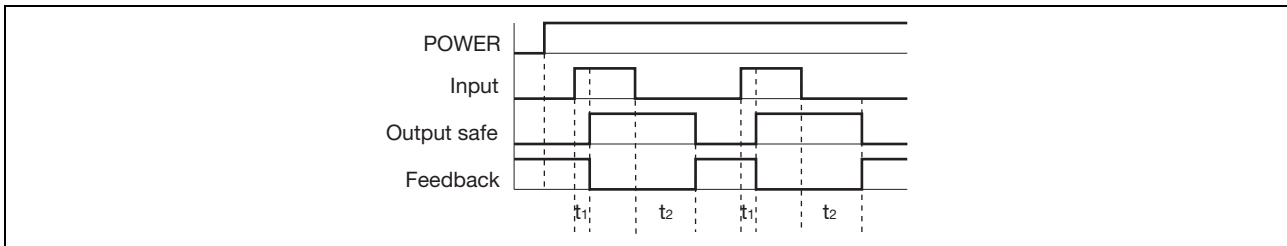


## Delayed PZE X4V

### Function description

- ▶ Single-channel operation: one input circuit affects both output relays

### Timing diagram



### Key

- ▶ Power: Supply voltage
- ▶ Input: Input circuits A1
- ▶ Output safe: Safety contacts 17-18, 27-28, 37-38, 47-48
- ▶ Feedback: Feedback loop Y1-Y2
- ▶  $t_1$ : Switch-on delay
- ▶  $t_2$ : Delay-on de-energisation

### Wiring

Please note:

- ▶ Information given in the “Technical details” must be followed.
- ▶ Outputs 17-18, 27-28, 37-38, 47-48 are delay-on de-energisation safety contacts.
- ▶ To prevent contact welding, a fuse should be connected before the output contacts (see technical details).
- ▶ Calculation of the max. cable runs  $I_{\max}$  in the input circuit:

$$I_{\max} = \frac{R_{l\max}}{R_l / \text{km}}$$

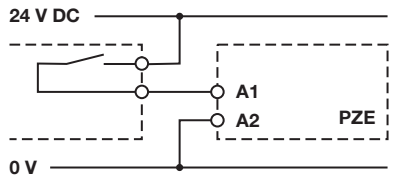
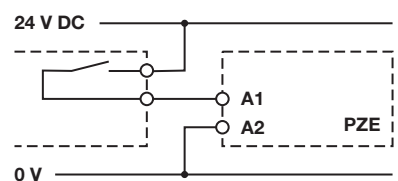
$R_{l\max}$  = max. overall cable resistance (see technical details)  
 $R_l / \text{km}$  = cable resistance/km

- ▶ Use copper wire that can withstand 60/75 °C.
- ▶ Sufficient fuse protection must be provided on all output contacts with capacitive and inductive loads.

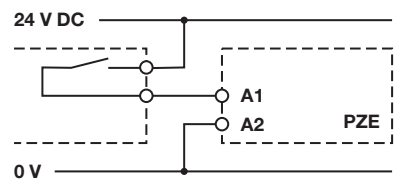
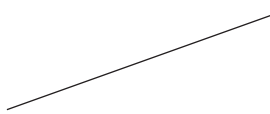
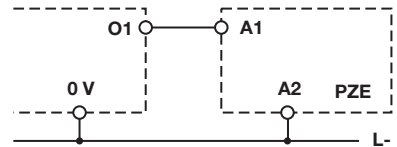
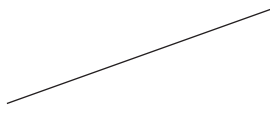
## Delayed PZE X4V

### Preparing for operation

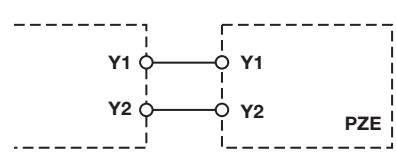
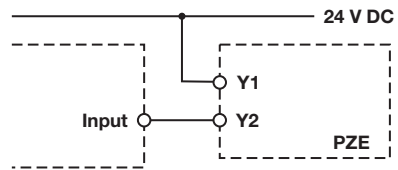
#### ► Supply voltage

Supply voltage	AC	DC
		

#### ► Input circuit

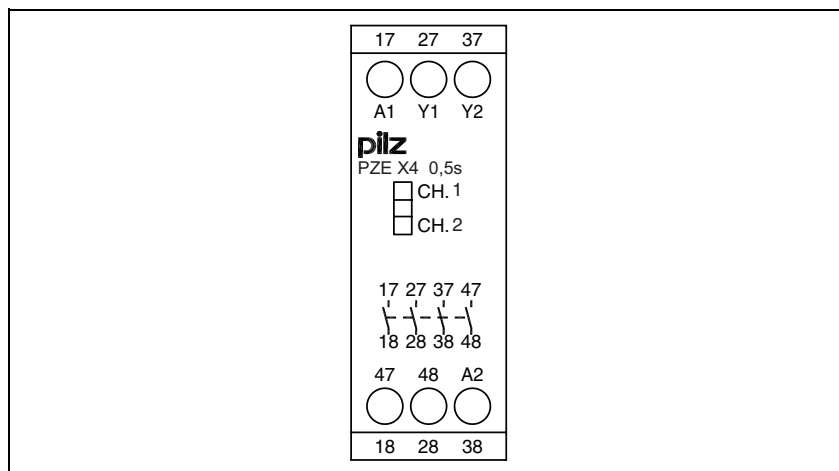
Input circuit	Single-channel	Dual-channel
Base unit: PNOZ X safety relay Driven via safety contacts		
Base unit: PNOZelog safety relay Driven via semiconductor outputs (24 VDC)		

#### ► Feedback loop

Feedback loop	Base unit: PNOZ X safety relay	Base unit: PNOZelog safety relay
Y1, Y2 and Input are inputs on the base unit; they evaluate the feedback loop		

## Delayed PZE X4V

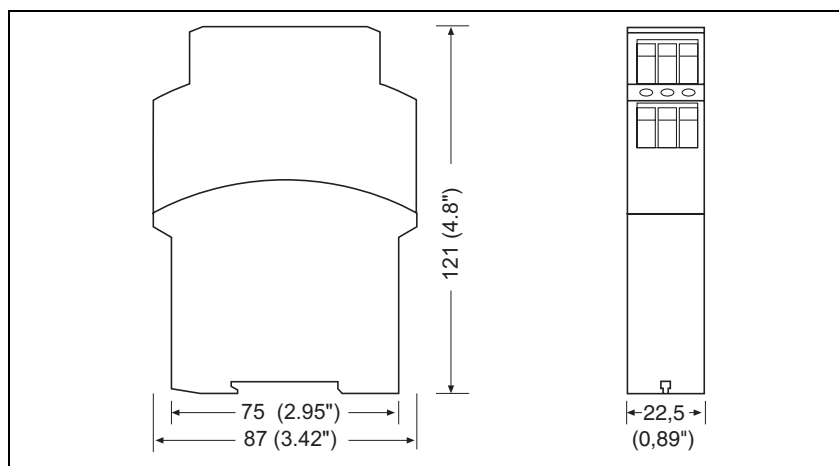
### Terminal configuration



### Installation

- ▶ The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- ▶ Use the notch on the rear of the unit to attach it to a DIN rail.
- ▶ Ensure the unit is mounted securely on a vertical DIN rail (35 mm) by using a fixing element (e.g. retaining bracket or an end angle).

### Dimensions

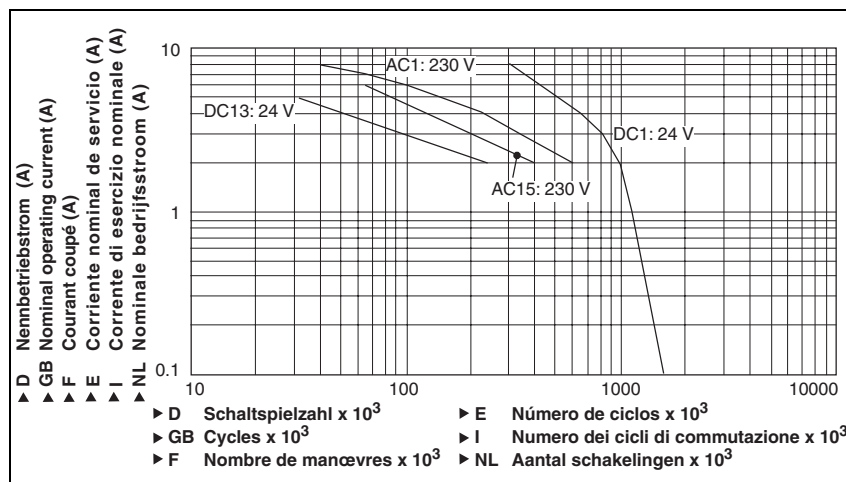


## Delayed PZE X4V

### Notice

This data sheet is only intended for use during configuration. For installation and operation, please refer to the operating instructions supplied with the unit.

### Service life graph



### Technical details

#### Electrical data

Supply voltage $U_B$ DC	<b>24 V</b>
Voltage tolerance	<b>-15 % / +10 %</b>
Power consumption at $U_B$ DC	<b>2.5 W</b>
Residual ripple DC	<b>20 %</b>
Voltage and current at Input circuit: <b>24 VDC</b>	<b>85 mA</b>
Output contacts in accordance with EN 954-1, Category <b>4</b>	Safety contacts (N/O): <b>4</b>
Utilisation category in accordance with <b>EN 60947-4-1</b> <b>AC1: 240 V</b>	$I_{min}: 0.01 \text{ A}, I_{max}: 5 \text{ A}$ $P_{max}: 1200 \text{ VA}$
<b>DC1: 24 V</b>	$I_{min}: 0.01 \text{ A}, I_{max}: 5 \text{ A}$ $P_{max}: 120 \text{ W}$
Utilisation category in accordance with <b>EN 60947-5-1</b> <b>AC15: 230 V</b>	$I_{max}: 3 \text{ A}$
<b>DC13 (6 cycles/min): 24 V</b>	$I_{max}: 4 \text{ A}$
Contact material	<b>AgSnO<sub>2</sub> + 0.2 μm Au</b>
External contact fuse protection ( <b>EN 60947-5-1</b> )	
Blow-out fuse, quick	<b>6 A</b>
Blow-out fuse, slow	<b>4 A</b>
Circuit breaker	<b>4 A, 24 VAC/DC, characteristic B/C</b>
Max. overall cable resistance $R_{lmax}$ Input circuits Single-channel at $U_B$ DC	<b>30 Ohm</b>

## Delayed PZE X4V

Times	
Switch-on delay	
with automatic reset after power on typ.	<b>23 ms</b>
with automatic reset after power on max.	<b>40 ms</b>
Delay-on de-energisation	
with E-STOP typ.	<b>0.5 s</b> Order no.: 774580 <b>0.75 s</b> Order no.: 774586 <b>1 s</b> Order no.: 774581 <b>2 s</b> Order no.: 774582 <b>3 s</b> Order no.: 774583
with power failure typ.	<b>0.5 s</b> Order no.: 774580 <b>0.75 s</b> Order no.: 774586 <b>1 s</b> Order no.: 774581 <b>2 s</b> Order no.: 774582 <b>3 s</b> Order no.: 774583
Tolerance	<b>-50 % / +50 %</b>
Supply interruption before de-energisation	<b>20 ms</b>
Environmental data	
EMC	<b>EN 60947-5-1, EN 61000-6-2</b>
Vibration in accordance with <b>EN 60068-2-6</b>	
Frequency	<b>10 - 55 Hz</b>
Amplitude	<b>0.35 mm</b>
Climatic suitability	<b>EN 60068-2-78</b>
Airgap creepage	<b>VDE 0110-1</b>
Ambient temperature	<b>-10 - 55 °C</b>
Storage temperature	<b>-40 - 85 °C</b>
Protection type	
Mounting (e.g. cabinet)	<b>IP54</b>
Housing	<b>IP40</b>
Terminals	<b>IP20</b>
Mechanical data	
Housing material	
Housing	<b>PPO UL 94 V0</b>
Front	<b>ABS UL 94 V0</b>
Max. cross section of external conductors with screw terminals	
1 core flexible	<b>0.20 - 4.00 mm<sup>2</sup></b>
2 core, same cross section, flexible:	
with crimp connectors, without insulating sleeve	<b>0.20 - 2.50 mm<sup>2</sup></b>
without crimp connectors or with TWIN crimp connectors	<b>0.20 - 2.50 mm<sup>2</sup></b>
Torque setting with screw terminals	<b>0.60 Nm</b>
Dimensions (H x W x D)	
with screw terminals	<b>87 mm x 22.5 mm x 121 mm</b>
Weight	<b>200 g</b> Order no.: 774580, 774586 <b>205 g</b> Order no.: 774581 <b>215 g</b> Order no.: 774582, 774583

The standards current on **09/04** apply.

Max. continuous current	
Number of contacts	$I_{\max}$ (A) at $U_B$ DC
1	<b>5.0 A</b>
2	<b>5.0 A</b>
3	<b>4.5 A</b>
4	<b>4 A</b>

## Delayed PZE X4V

### Order reference

Type	Features	Terminals	Order no.	
PZE X4V	24 VDC	0.5 s fixed	Screw terminals	774 580
PZE X4V	24 VDC	0.75 s fixed	Screw terminals	774 586
PZE X4V	24 VDC	1 s fixed	Screw terminals	774 581
PZE X4V	24 VDC	2 s fixed	Screw terminals	774 582
PZE X4V	24 VDC	3 s fixed	Screw terminals	774 583