


NO	DESCRIPTION	DATE
△1	BACKGROUND FORMAT UPDATED	03.29.04
△2	BACKGROUND FORMAT UPDATED	04.14.09'
△3	DEL WORKING VOLTAGE DEL PROOF VOLTAGE ADD DC RESISTANCE ADD POWER RATING	11.08.11'
△4	ADD VSWR	11.07.12'

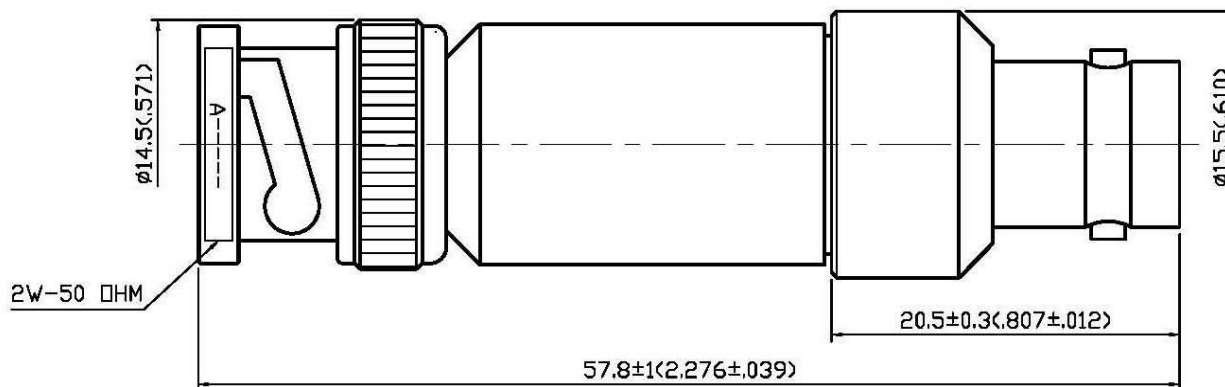

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 DC RESISTANCE: 50 OHMS±5% △3
- 1.4 POWER RATING: 2W △3
- 1.5 VSWR: 1.7 MAX. @300 MHz △4

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

### 3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 ENVIRONMENTAL

4.1 OPERATING TEMPERATURE RANGE: -40° C TO +70° C

11	INSULATION	TEFLON	1	NONE
10	BODY II	BRASS	1	SILVER 70μ" MIN.
9	RESISTOR	2W-50Ω	1	NONE
8	BODY I	BRASS	1	SILVER 70μ" MIN.
7	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD
6	WASHER	BRASS	1	SILVER 70μ" MIN.
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER	BRASS	1	NICKEL
3	GASKET	SILICONE	1	RED
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	SILVER 70μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		BNC STRAIGHT PLUG-JACK FEEDTHRU TERMINATION						
製圖	DRAWN	TOLERANCE	品名	13-58 T.G.S	日期	DATE	版次	REV.
	Yoko							
檢圖	CHECK	單位	UNIT	DWG.NO.	13-0564			
	Arc					mm(in)		
認定	APPROVAL	ANGLE	SCALE					
	Angela			±5°	3:1			