

1

2

3

4

5




6

7

A

NOTES:

1. Insulation: 30% Glass Filled PBT, UL94V-0
2. Contact : Brass
3. Current Rating: 3A Max
4. Dielectric Voltage: 1000V rms / 1 minute
5. Insulation Resistance: 1000M ohm Min.
6. Contact Resistance: 30m ohm Max.
7. Operating and Storage Temperature: -40°C ~ +105°C
8. Mating Cycles: 10 Min.

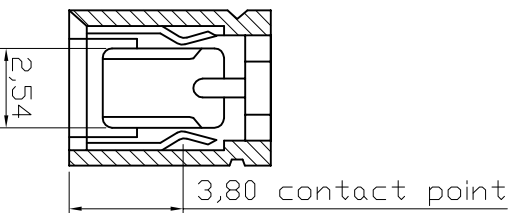


A-A Section

AKSPT/x - x

Color:
 GREY - Grey
 RED - Red
 BLUE - Blue
 BLACK - Black

Contact Area Plating: ④
 G: Gold Flash
 Z: Tinned



D

D

E

E

F

F

G

G

RoHS compliant
 Unit:mm

Scale	Free								
TOLERANCE									
.X	±0.38	④	Update	07.06.2013	Winnie	Drawn	29.10.1995	Hellwig	Customer-No.
.XX	±0.25	④	Update			Approved	07.06.2013	Winnie	ASSMANN WSW-No.
.XXX	±0.13	③	Update the material of contact	15.10.2012	Amv				AKSPT/x-X
DIM	TOL	②	Update	27.07.2009	Rate	Drawing-No.		ASSMANN WSW-No.	
X. °	±1°	①	Drawn	29.10.1995	Hellwig	ASS 0336 CO		rev04	
Angle	TOL	Modification		Date	Name	Replace		SHEET	
UNIT	mm	Id.							

ASSMANN
 WSW/ components

1

2

3

4

5

6

7

H

H