


## screwless connection terminals Nylbloc™ auto

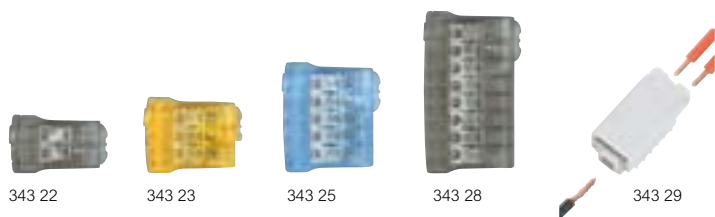

Pack	Cat.Nos	Screwless connection terminals - Nylbloc auto
100	343 22	No tool direct connection after simple stripping of copper conductors
100	343 23	Test socket for tester screwdriver or test tip
100	343 25	Cat.No 394 45 (p. 355) for IP 2x test or Ø4 mm tip on Nylbloc auto terminals
50	343 28	Conform to EN 60998-2-2
		For rigid cable from 0.75 to 2.5 mm <sup>2</sup>
		Stripping length: 11 mm
		Connection by separate crimping blades
		Transparent rase providing full visibility of the connections
		Colour code to identify products
		Duplix marking possible on 3.5 and 8-wire terminals
		Max. intensity: 24 A
		Insulating voltage: 450 V~
		Grey terminal for 2 wires
		Orange terminal for 3 wires
		Blue terminal for 5 wires
		Grey terminal for 8 wires

Pack	Cat.Nos	Mixed screwless connection terminal
100	343 29	Enables connection of rigid and flexible cable
		- 2 incoming for rigid cable from 1 to 2.5 mm <sup>2</sup> (power supply and shunt)
		- 1 outgoing for flexible cable or from 0.5 to 2.5 mm <sup>2</sup> (use)
		Stripping length: 8-9 mm
		Flexible cable connection by simple push on terminal
		Connection by separate crimping blades
		Max. intensity: 24 A
		Insulating voltage: 400 V~
		Mixed grey terminal

Pack	Cat.Nos	Accessories
1/5	343 99	<b>Conductor stripping tool</b> For cable desheathing and rapid wire stripping in flush-mounting and junction boxes, in trunking For cable Ø8 mm to 13 mm (from 2 G 1.5 to 5 G 2.5 mm <sup>2</sup> ) and wires 1.5 mm <sup>2</sup> and 2.5 mm <sup>2</sup>
10	343 98	<b>Nylbloc auto terminal support</b> For up to 3 screwless connection terminals Nylbloc auto (Cat.Nos 343 22/23/25/28) Direct fixing: - in top of Plexo boxes and industrial plastic cabinets ≥ 130 x 130 mm - on flat bar 12 x 2 mm - in bottom of fully assembled, adaptable and aluminium DLP trunkings (from 50 x 80 mm) Screw fixing: - in bottom of Plexo boxes ≥ 105 x 105 mm and industrial plastic cabinets - universal Fixing on rail with accessory Cat.No 048 11 (p. 250) Accessible test socket Marking zone with felt tip pen Cat.No 395 98 (p. 354)

## Nylbloc™ screw terminal strips and connectors without screws



Pack	Cat.Nos	Nylbloc connection strips			
		12 elements with captive screws			
		Supplied with screws undone			
		Flame retardant polypropylene (-25°C to +100°C)			
		Ambient temperature from -25°C to +55°C (T 55)			
		Conform to EN 60998-2-1 and EN 60664-1			
		Self-extinguishing to EN 60695-2-11 at 850°			
		Insulation voltage: 250 V according to EN 60 998-2-1			
		Use at 400 V integrated in a series of products that comply with the requirements of EN 60664-1, pollution degree 2, overload category III			
		Rated capacity (mm <sup>2</sup> )	hole Ø (mm)	Max current (A)	
10	Black	342 11	2.5	2.5	24
10	342 13	6	3.5	41	
10/200	342 15	10	4.5	57	
10	342 17	16	5.5	76	
10	342 19	25	7	101	
	White				
10	342 21	2.5	2.5	24	
10	342 23	6	3.5	41	
10	342 25	10	4.5	57	
10	342 27	16	5.5	76	

Pack	Cat.Nos	Connectors without screws - Capvis caps			
		Rapid connection for 1.5 - 2.5 - 4 and 6 mm <sup>2</sup> solid conductor cables - 440 V insulation			
		Nominal capacity (mm <sup>2</sup> )	No of cables and corresponding sections (mm <sup>2</sup> )	Cap colour	Packaging type
100/1000	343 38	1.5	3 to 5 of 0.5 <sup>2</sup> 2 to 4 of 0.75 <sup>2</sup> 2 of 1.5 <sup>2</sup>	blue	box
100/1000	343 44	1.5 to 2.5	3 to 5 of 0.5 <sup>2</sup> 2 to 5 of 0.75 <sup>2</sup> 2 to 3 of 1.5 <sup>2</sup> 2 of 2.5 <sup>2</sup>	orange	box
100/2 000	343 51	4	2 to 4 of 1.5 <sup>2</sup> 2 to 3 of 2.5 <sup>2</sup> 2 of 4 <sup>2</sup>	yellow	box
100	343 57	6	2 to 5 of 2.5 <sup>2</sup> 2 to 3 of 4 <sup>2</sup> 2 of 6 <sup>2</sup>	red	box
2 000	6340 51	4	2 to 4 of 1.5 <sup>2</sup> 2 to 3 of 2.5 <sup>2</sup> 2 of 4 <sup>2</sup>	yellow	bucket
1 500	6340 52	6	2 to 5 of 2.5 <sup>2</sup> 2 to 3 of 4 <sup>2</sup> 2 of 6 <sup>2</sup>	red	bucket